


Mixed Thickness Feeder - 2

Model MTF2

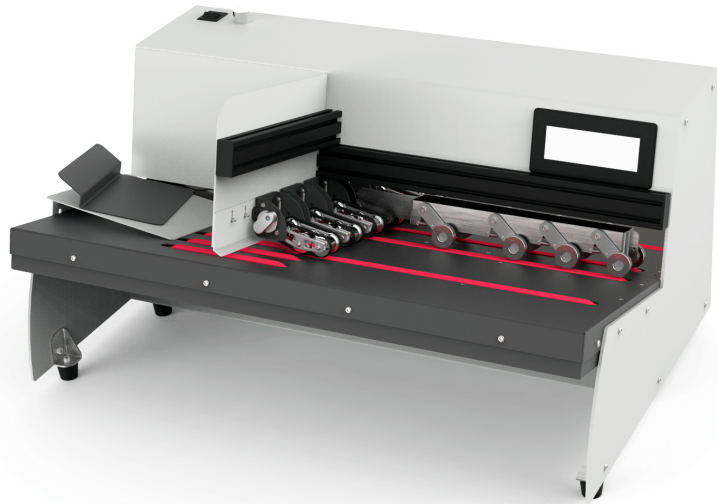

The feeder that should be used for equipment with no feeder or an inferior feeder!

Use for mailing/postage machines, color printers, inserters, binding equipment, address printers, laminators, and many more.

The No Skills Feeder

There are no adjustments nor guides to set - just load and hit the go button

Mixed Thickness Separator

This separator design ensures that only one envelope passes through the machine at a time maximizing separation and improving count accuracy.

High Speed

Feeds up to 32,000 envelopes per hour. Feeds mixed mail, from the smallest to the largest, completely. Feeds up to 12mm (1/2") thick envelopes. Entire system built to handle large flats and envelopes.

Simple and Reliable

High degree of operational reliability

Heavy Duty

Solid metal construction throughout. Made of steel using the highest quality of components. Has two motors for better performance and a longer life.

Standard Features:

Resettable counter, batch counter, rate counter, lifetime counter, on demand feeding, on delay feeding, variable speed

Specifications:

Length: 710mm (28in) **Depth:** 463mm (18in) **Height:** 330mm (13in) **Weight:** 30kg (67lbs)

Power: 88-132VAC (6.5A Max) or 176-264VAC (6.5A Max)

Envelope Size: All sizes and types. **Maximum Thickness:** 12mm (1/2")

Feeder Capacity: Approx. 100 envelopes

Theoretical speed: 32,000 envelopes per hour **Production speed:** 10,000 envelopes per hour

(If you have a trained octopus as an operator, revert to the theoretical speed)

POSTMARK

PHONE | 805.594.1454

251 Wedcor Ave.
Wabash, IN 46992

WWW.POSTMARK-USA.COM